



Green economy –  
Pump and Valve

Informazioni tecniche di  
composizione utili ad un  
futuro smaltimento

# Solenoid valve brass version

Material	%
Ferrous Metal	35,8%
Non-Ferrous metal	45,2%
Rubber	0,1%
Plastic	18,9%
Total	100,0%

Product name	55 series
Average Lifetime	210 hours
Watt	10




Electrical power consumption during life     $10 \text{ WEI} \cdot 210 \text{ h} = 2100 \text{ Wh} = 2,1 \text{ kWhEI}$

# Solenoid valve brass version

Material	%
Ferrous Metal	52,9%
Non-Ferrous metal	20,1%
Rubber	0,3%
Plastic	26,7%
Total	100,0%

Product name	V3 series
Average Lifetime	210 hours
Watt	10

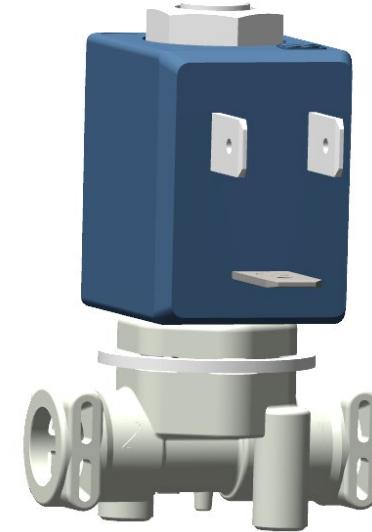


Electrical power consumption during life     $10 \text{ WEI} \cdot 210 \text{ h} = 2100 \text{ Wh} = 2,1 \text{ kWhEI}$

# Solenoid pump E series

Material	%
Plastic	14,3%
Rubber	0,2%
Ferrous metal	41,9%
Non-ferrous metal	43,5%
Electronic components	0,1%
Total	<b>100,0%</b>

Product name	EP5
Average Lifetime	250 hours
Watt	48

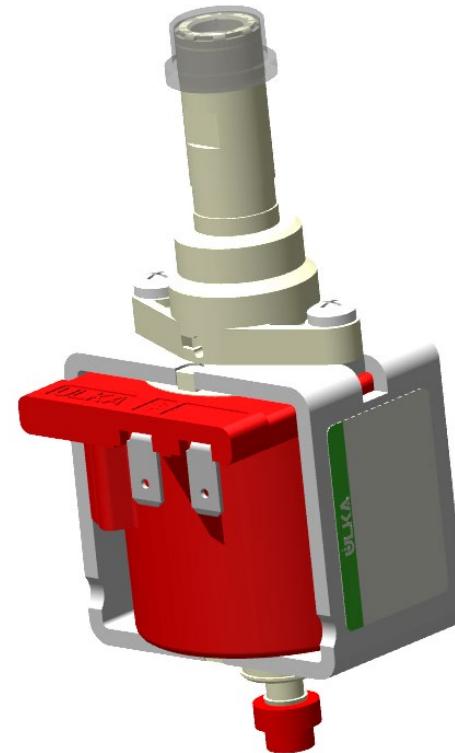

Electrical power consumption during life     $48 \text{ WEI} \cdot 250 \text{ h} = 12000 \text{ Wh} = 12 \text{ kWhEI}$

# Solenoid pump – HF series

Material	%
Plastic	18,7%
Rubber	0,2%
Ferrous metal	37,1%
Non-ferrous metal	43,8%
Electronic components	0,2%
Total	<b>100,0%</b>

Product name	HF
Average Lifetime	250 hours
Watt	23



Electrical power consumption during life     $23 \text{ WEI} \cdot 250 \text{ h} = 5750 \text{ Wh} = 5,7 \text{ kWhEl}$

Thank you



[www.cemegroup.com](http://www.cemegroup.com)